

PURUI FIBER CEMENT FELT





ABOUT US

PURUI .One of the top fiber cement felt manufactory in china. With more than 20 years experience in fiber cement industry. we service more than 80 fiber cement company in china.


we provide Hatschek machine felt and Flow on process machine felt for FC industry. With customer demanded ,we also trade some accessroy for FC company, such as S.S wires mesh,abrasive belt etc..

FE-SPEED –FLOW_ON MACHINE FELT

Basis weight	1450-1700 GSM
Base fabric weigh)	850-1200 GSM
Web weight	500-700 GSM
BASE : WEB	59/ 41
MD Yarn	NYLON PLIED MONO 2 layers
CD Yarn	NYLON PLIED MONO 2 layers
Batt on sheet side	33& 55 Dtex.
Batt on roll side	55Dtex
Calliper at dry state	4.0-4.8
Air permeability	130cfm
Treatment	Pre-compaction.
Elongation	About 1.5% /good strength

Comments:

- 1: Coarse fiber provide good dewatering
- 2: Easy to clean and long life time
- 3: The lost of the pulp can be changed by customer demanded

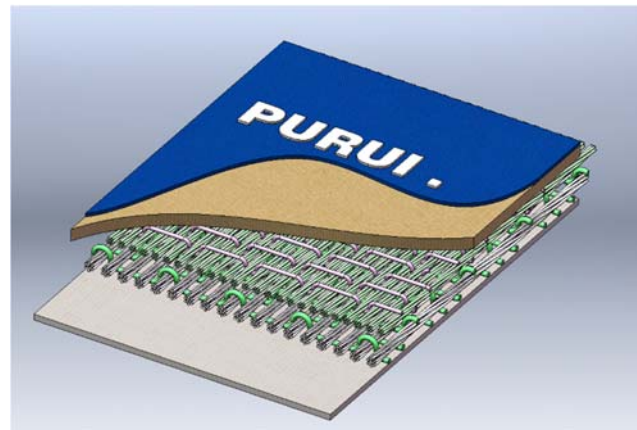


FE-SMOOTH -FLOW_ON MACHINE FELT

Basis weight	1700-2100 GSM
Base fabric weigh)	950-1500 GSM
Web weight	600-750 GSM
BASE : WEB	AROUND 57/ 43
MD Yarn	NYLON PLIED MONO 3 layers
CD Yarn	NYLON PLIED MONO 3layers
Batt on sheet side	17& 44 /55Dtex.
Batt on roll side	44 /55Dtex
Calliper at dry state	4.8-5.2 mm
Air permeability	110-130
Treatment	Pre-compaction.
Elongation	About 1- 1.5%

Comments:

- 1: Mark free of the felt
- 2: Good MD strength
- 3: Less vacuum cost

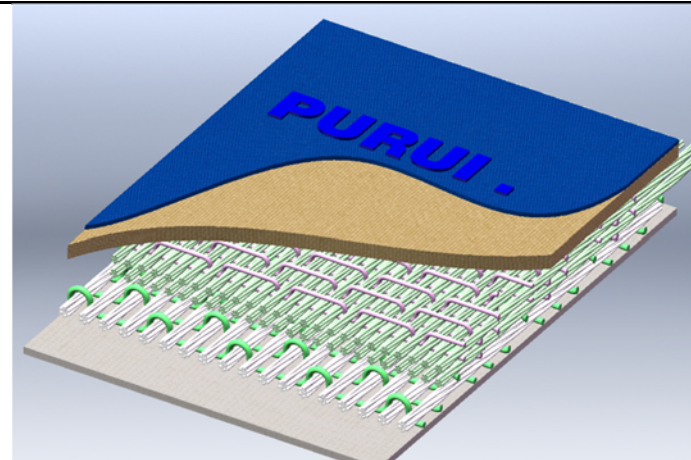

FE-MARK -FLOW_ON MACHINE FELT

Basis weight	1700-2200 GSM
Base fabric weigh)	1000-1600 GSM
Web weight	600-700 GSM
BASE : WEB	ABOUT 59/ 41
MD Yarn	NYLON PLIED MONO 2 layers
CD Yarn	NYLON PLIED MONO 2 layers
Batt on sheet side	22& 55/67Dtex.
Batt on roll side	55/67Dtex
Calliper at dry state	4.8-5.3 mm
Air permeability	120-150cfm
Treatment	Pre-compaction.
Elongation	About 1- 1.5%
Comments: 1: Can give felt mark on board surface 2: Good dewatering 3: Easy to clean and long life time	